# **PVC NON PRESSURE SYSTEM**

# **STORMWATER**



# W160101010 • DN100 Stormwater PVC-U Square Kerb Adaptor SWJ

**APPLICATION** Connects pipeline conveying rainwater or surface water to a square downpipe.

#### **FEATURES**


- Australian Made
- BEP PVC Manufactured from Best Environmental Practice PVC
- Installation Economics

- Operation Efficiencies
- · Corrosion Resistant
- Tree root intrusion resistance

# TECHNICAL DATA PRODUCT PROPERTIES

Primary Material	PVC
Colour	White
Joint Type	SWJ
Allowable Operation Temperature - Degrees	50
Average # of Joints per Litre – Iplex Solvent	40
Average Number of Joints per Litre - Iplex Primer	120
Unprotected UV Exposure (years)	2 Years

#### **PRODUCT DIMENSIONS**

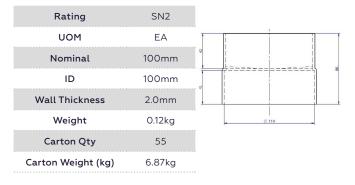

## **ENVIRONMENTAL CREDENTIALS AND STANDARDS**

Environmental Accreditation	Best Environmental PVC - PVC Certificate No. BEP-PVC 0037

**Product Standard** AS/NZS 1254 "PVC-U Pipes and Fittings for Stormwater and Surface Water Applications"

# **MATERIAL PROPERTIES**

### **MECHANICAL**

Density Specific Gravity	1.47
Ultimate Tensile Strength	52MPa
Yield Strain	5.5%
Compressive Strength	66MPa
Tensile Modulus	2750MPa
Hardness Shore D	85
Poissons Ratio	0.38
Ring Bending Modulus (3mins)	3200MPa
Ring Bending Modulus (50Yrs)	1400MPa

# **THERMAL**

Coefficient of Thermal Expansion	7 x 10 <sup>-5</sup> /°C
Thermal Conductivity	0.138W/m.K
Specific Heat	1047 J/kg/°C
Vicat Softening Temperature	75°C
Flammability	Will not support combustion
Fire Index – Ignitability	8
Fire Index – Smoke Development	8
Fire Index – Spread of Flame	0
Fire Index – Heat Evolved	1

© Copyright: Iplex Pty Ltd 2019 all rights reserved. All drawings and information contained thereon are the exclusive property of Iplex Pipelines. Unless specifically noted, this drawing and information enclosed are subject to change at any time. Measures are for reference purpose only. If critical please contact Iplex Pipelines.



