
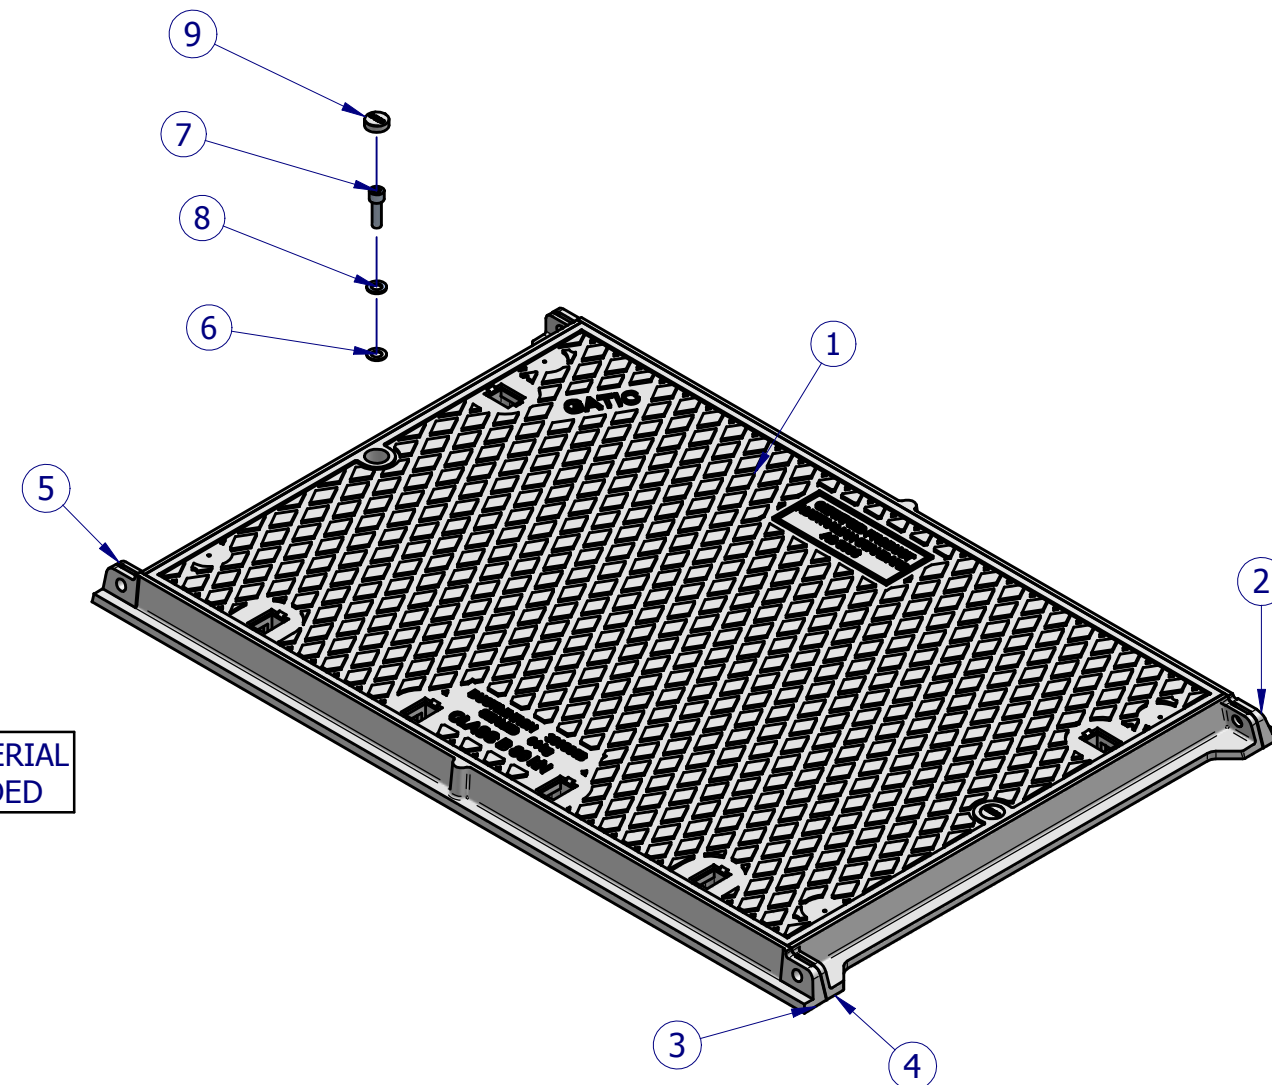


© Copyright : Gatic Pty Ltd - 2008

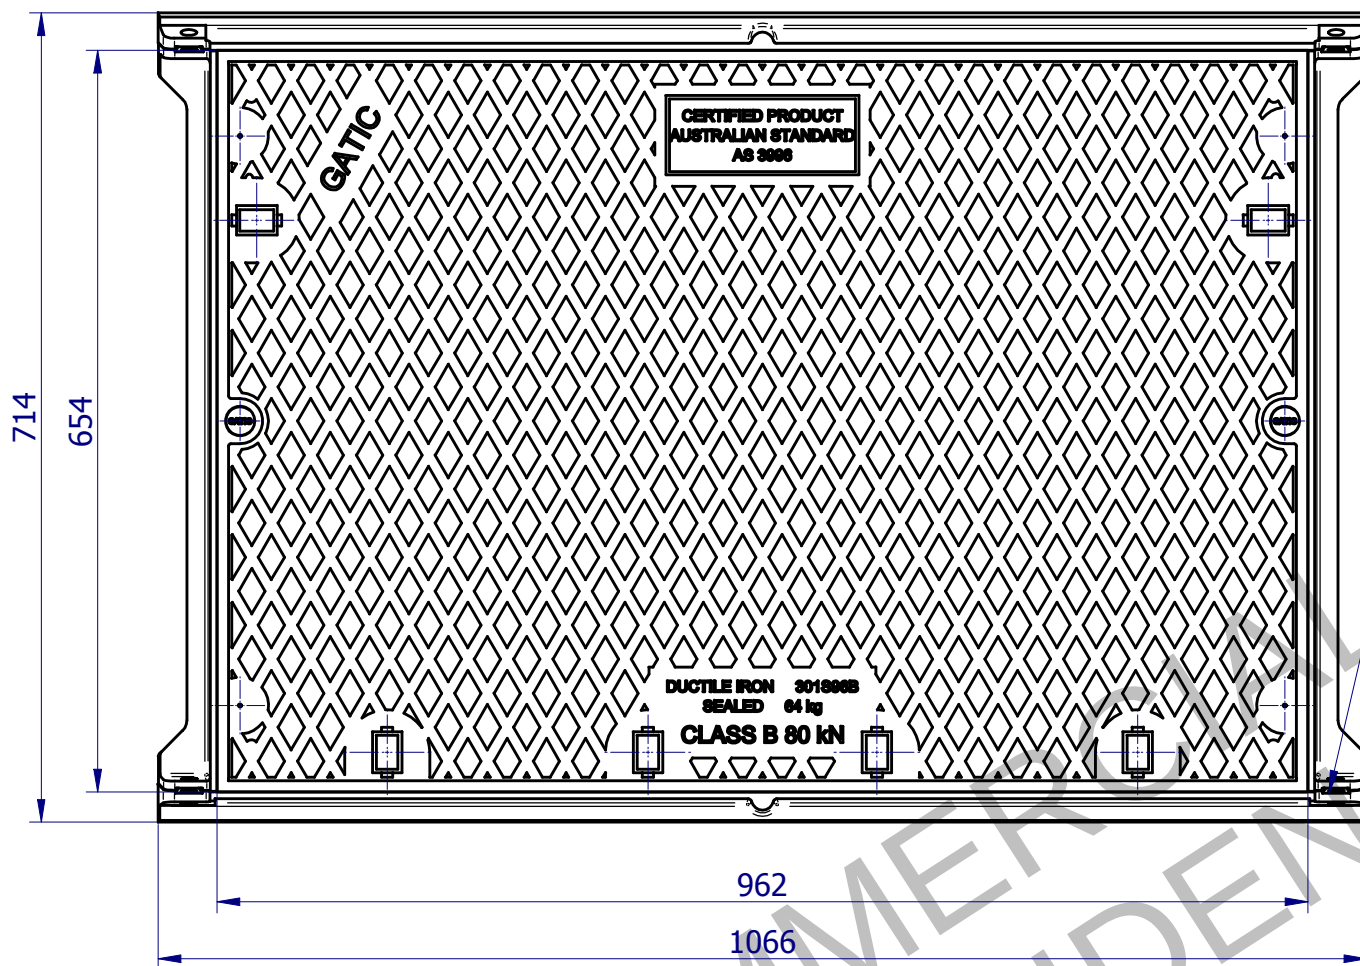

Item No.	Document No.	Revision	Title	Material	Qty	Mass
1	2893	A	914x610 C/O Solid Top Cover Class B	Ductile Iron 500 - 7	1	63.4 kg
2	2707	B	914 mm Under Cut Bar Class B	Ductile Iron 500 - 7	1	6.3 kg
3	2706	B	914 mm Draw Cut Bar Class B	Ductile Iron 500 - 7	1	6.6 kg
4	2703	A	610 mm RH Side Bar Class B	Ductile Iron 500 - 7	1	4.3 kg
5	2704	A	610 mm LH Side Bar Class B	Ductile Iron 500 - 7	1	4.3 kg
6	2856	A	M10 Washer	Nylon, general purpose	2	0.0 kg
7	2858	A	M10x35 Socket Head Cap Bolt	Stainless Steel, 304	2	0.1 kg
8	2855	A	M10 Washer	Stainless Steel, 304	2	0.0 kg
9	2854	B	Plastic Plug Ø26 mm	UV Stabilized Nylon	2	0.0 kg

REVISION	No	DATE	DESCRIPTION	BY	CKD.	F.M.	S.S.	UNLESS OTHERWISE STATED	LINEAR MACHINING TOLERANCE:	ANGULAR MACHINING TOLERANCE:	NOM = Nominal; O/A = Overall; TYP = Typical; C/O = Clear Opening	FINISH:	GATIC	THIRD ANGLE PROJECTION	DESIGNED:	BY	DATE	CODE:	TITLE:	DRG. No:	MASS:	REV:
A	08-01-09	INITIAL RELEASE.		F.M.	S.S.			ALL MEASURES IN MILLIMETERS.	X. ±0.25 mm	X. ±0.5°		ALL CAST SURFACES TO BE PAINTED AS SPECIFIED. FABRICATED COMPONENTS TO BE HOT DIP GALVANISED TO AS4680. LIGHT FILM OF GATIC SEALING GREASE TO BE APPLIED ON ALL MACHINED SURFACES.			F.M.		29-06-08	301S96B	914x610 C/O SOLID TOP COVER & FRAME ASSY CLASS B		84.9 kg	
								GENERAL CAST TOLERANCES: CT9 to ISO 8062.	X.X ±0.10 mm	X.X ±0.1°					F.M.		08-01-09	N.T.S.				
								CASTING RADII: 3 mm							S.S.		08-01-09	FORMAT: A3				
								DRAFT TAPERS: 2°							H.B.		08-01-09	SHEET: 1 of 1		3146		A