
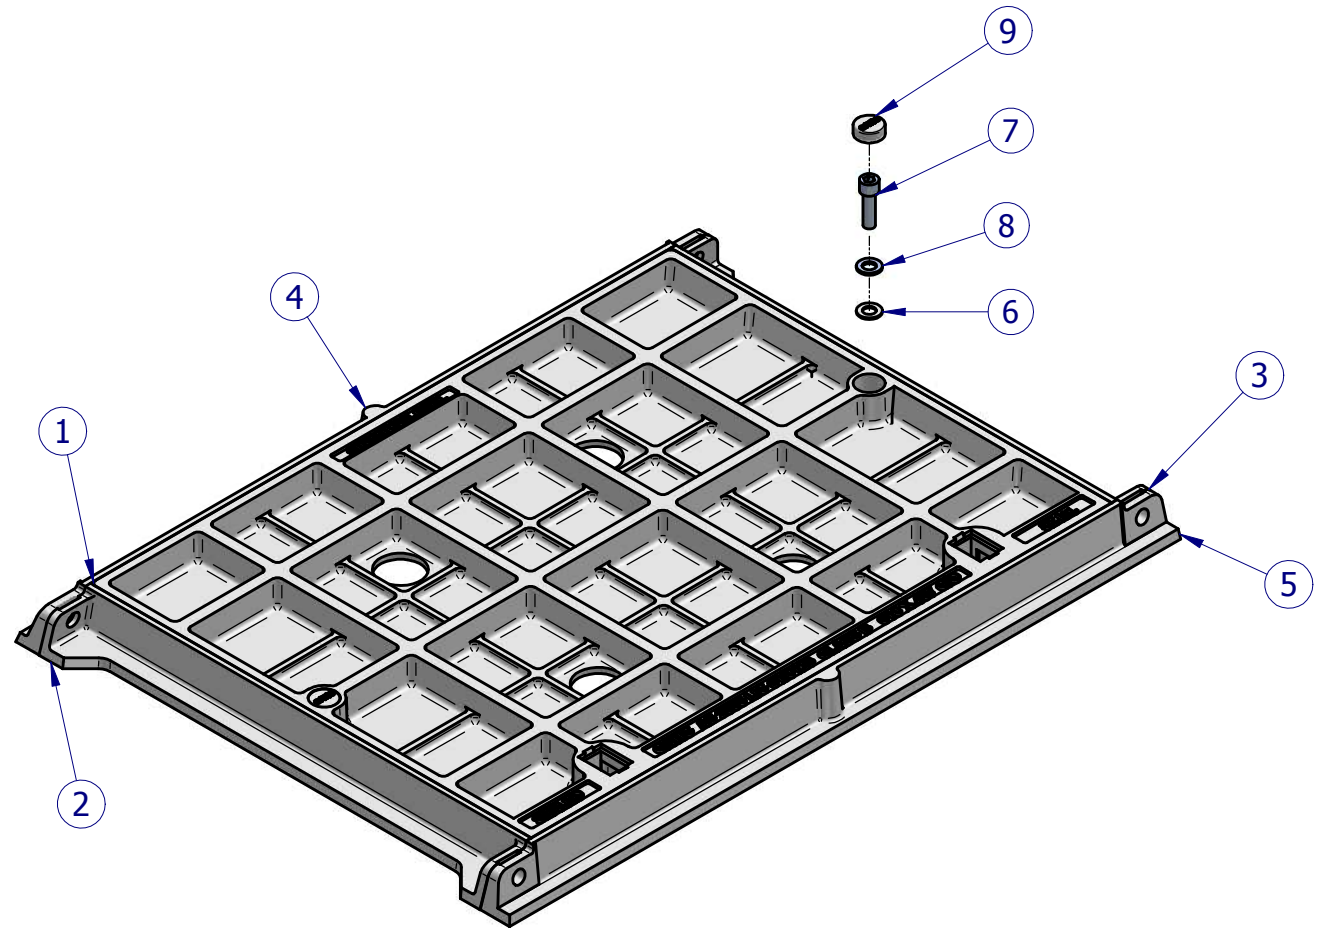


© Copyright - Gatic Pty Ltd - 2008

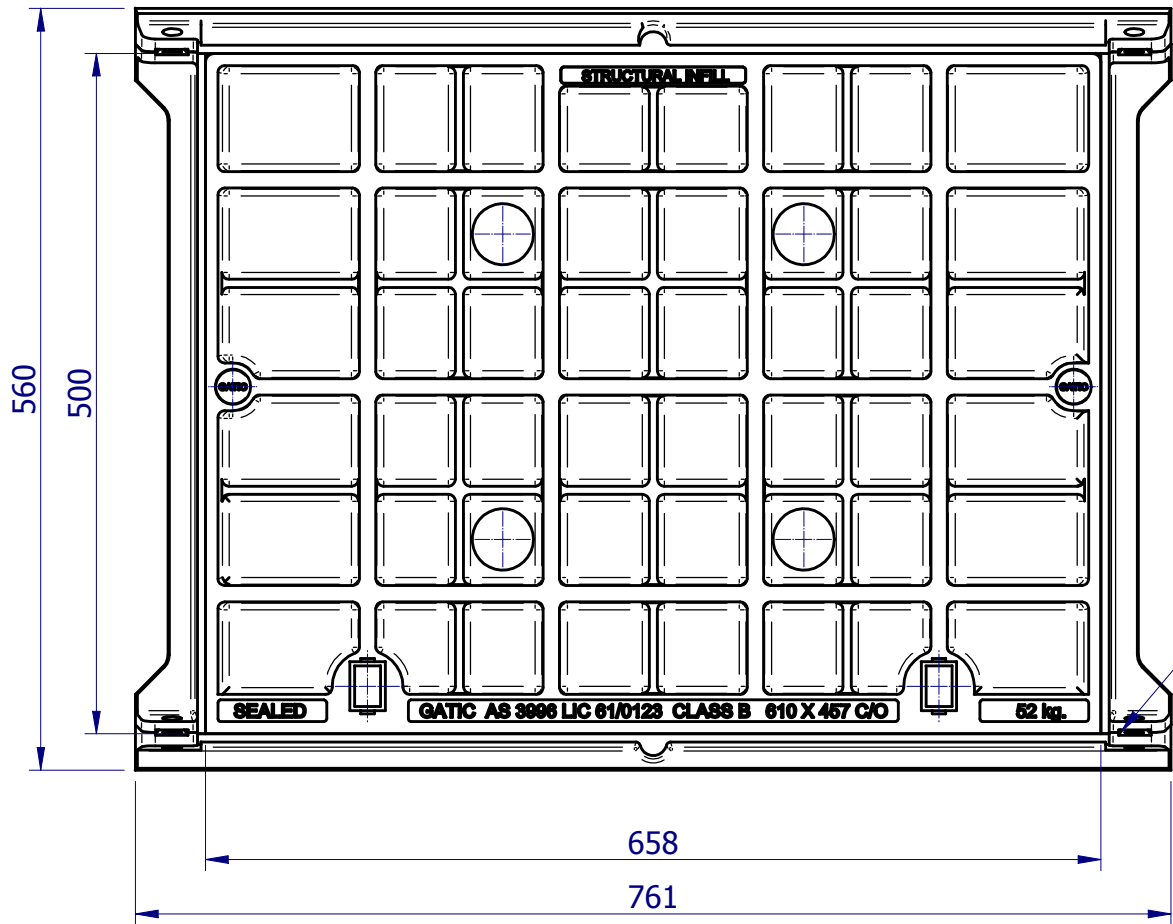

Item No.	Document No.	Revision	Title	Material	Qty	Mass
1	2742	A	610x457 C/O Concrete Infill Cover Class B	Ductile Iron 500 - 7	1	33.178 kg
2	2701	A	457 mm LH Side Bar Class B	Ductile Iron 500 - 7	1	3.304 kg
3	2700	A	457 mm RH Side Bar Class B	Ductile Iron 500 - 7	1	3.304 kg
4	2772	A	610 mm Under Cut Bar Class B	Ductile Iron 500 - 7	1	4.399 kg
5	2773	A	610 mm Draw Cut Bar Class B	Ductile Iron 500 - 7	1	4.624 kg
6	2856	A	M10 Washer	Nylon, general purpose	2	0.001 kg
7	2858	A	M10x35 Socket Head Cap Bolt	Stainless Steel, 304	2	0.074 kg
8	2855	A	M10 Washer	Stainless Steel, 304	2	0.008 kg
9	2854	B	Plastic Plug Ø26 mm	UV Stabilized Nylon	2	0.005 kg

REVISION							
No	DATE	DESCRIPTION	BY	CKD.	H.L.	S.S.	REV.
A	24-06-08	Initial Release					1 of 1

UNLESS OTHERWISE STATED
GENERAL CAST TOLERANCES:
CT9 to ISO 8062.
CASTING RADII: 3 mm
DRAFT TAPERS: 2°

ALL MEASURES IN MILLIMETERS.
MACHINING TOLERANCES:
X. ±0.25 mm
X.X ±0.10 mm
X.XX ±0.05 mm
ANGULAR:
X. ±0.5°
X.X ±0.1°

NOM = Nominal; O/A = Overall; TYP = Typical; C/O = Clear Opening
FINISH: ALL CAST SURFACES TO BE PAINTED AS SPECIFIED.
LIGHT FILM OF GATIC SEALING GREASE APPLIED TO MACHINED SURFACES.

GATIC
GATIC PTY LTD
9-15 Radford Road, PO Box 312, Reservoir VIC. 3073
Ph- 03 9316 2666 Fax- 03 9315 0099 www.gatic.com.au

THIRD ANGLE
PROJECTION

DESIGNED:	F.M.	DATE:	24-06-08
DRAWN:	H.L.	DATE:	24-06-08
CHECKED:	S.S.	DATE:	24-06-08
APPROVED:	H.B.	DATE:	27-06-07

TITLE: 610 X 457 C/O CONCRETE INFILL COVER & FRAME CLASS B
SCALE: N.T.S. CODE: GM301C64B A3 1 of 1
2785
A