


Copyright : Gatic Pty Ltd - 2014

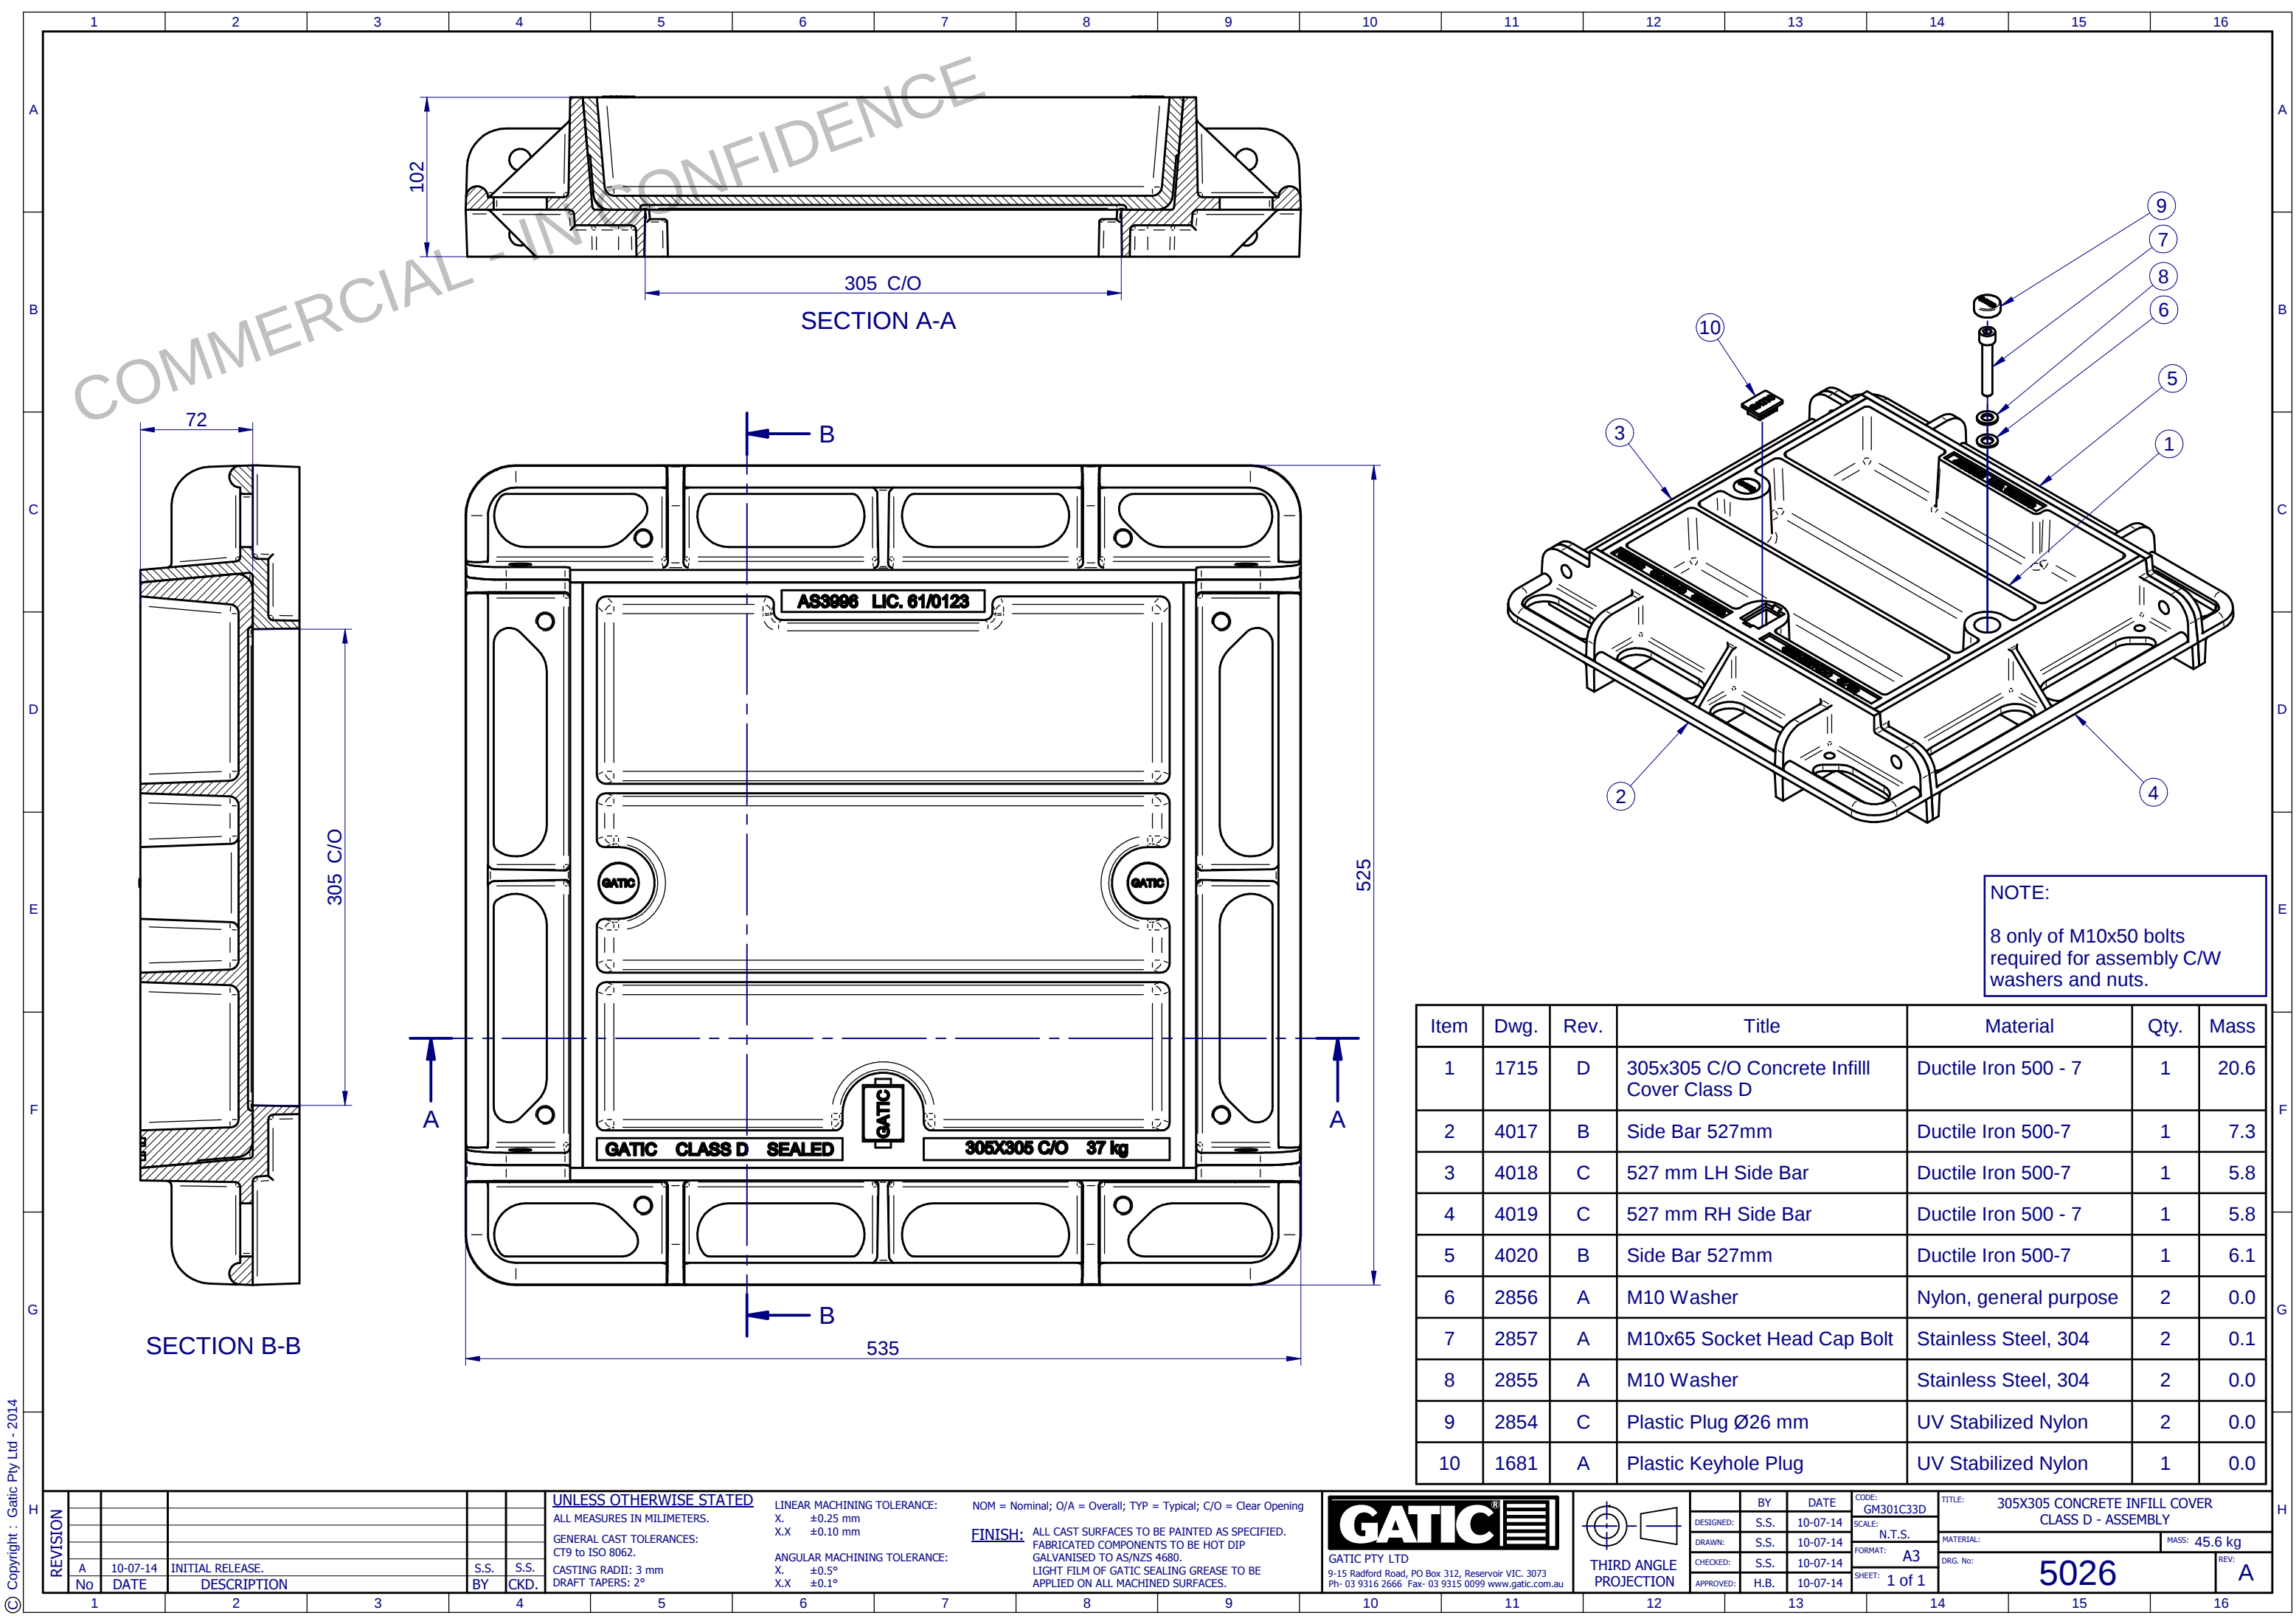

REVISION		DATE		DESCRIPTION		BY	CHKD.
A	No	10-07-14		INITIAL RELEASE.		S.S.	S.S.
1							
2							
3							
4							

UNLESS OTHERWISE STATED
ALL MEASURES IN MILLIMETERS.
GENERAL CAST TOLERANCES:
CT9 to ISO 8062.
CASTING RADII: 3 mm
DRAFT TAPERS: 2°

LINEAR MACHINING TOLERANCE:
X. ±0.25 mm
X.X ±0.10 mm
ANGULAR MACHINING TOLERANCE:
X. ±0.5°
X.X ±0.1°

NOM = Nominal; O/A = Overall; TYP = Typical; C/O = Clear Opening
FINISH: ALL CAST SURFACES TO BE PAINTED AS SPECIFIED.
FABRICATED COMPONENTS TO BE HOT DIP GALVANISED TO AS/NZS 4680.
LIGHT FILM OF GATIC SEALING GREASE TO BE APPLIED ON ALL MACHINED SURFACES.

GATIC
GATIC PTY LTD
9-15 Radford Road, PO Box 312, Reservoir VIC. 3073
Ph- 03 9316 2666 Fax- 03 9315 0099 www.gatic.com.au

THIRD ANGLE
PROJECTION

DESIGNED:	BY	DATE	CODE: GM301C33D
DRAWN:	S.S.	10-07-14	SCALE: N.T.S.
CHECKED:	S.S.	10-07-14	FORMAT: A3
APPROVED:	H.B.	10-07-14	SHEET: 1 of 1

TITLE:	305X305 CONCRETE INFILL COVER CLASS D - ASSEMBLY
MATERIAL:	
DRG. No:	5026
REV:	A
MASS:	45.6 kg