

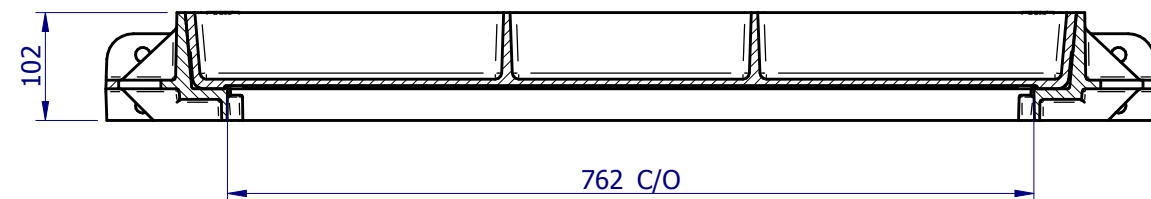



Copyright : Gatic Pty Ltd - 2018

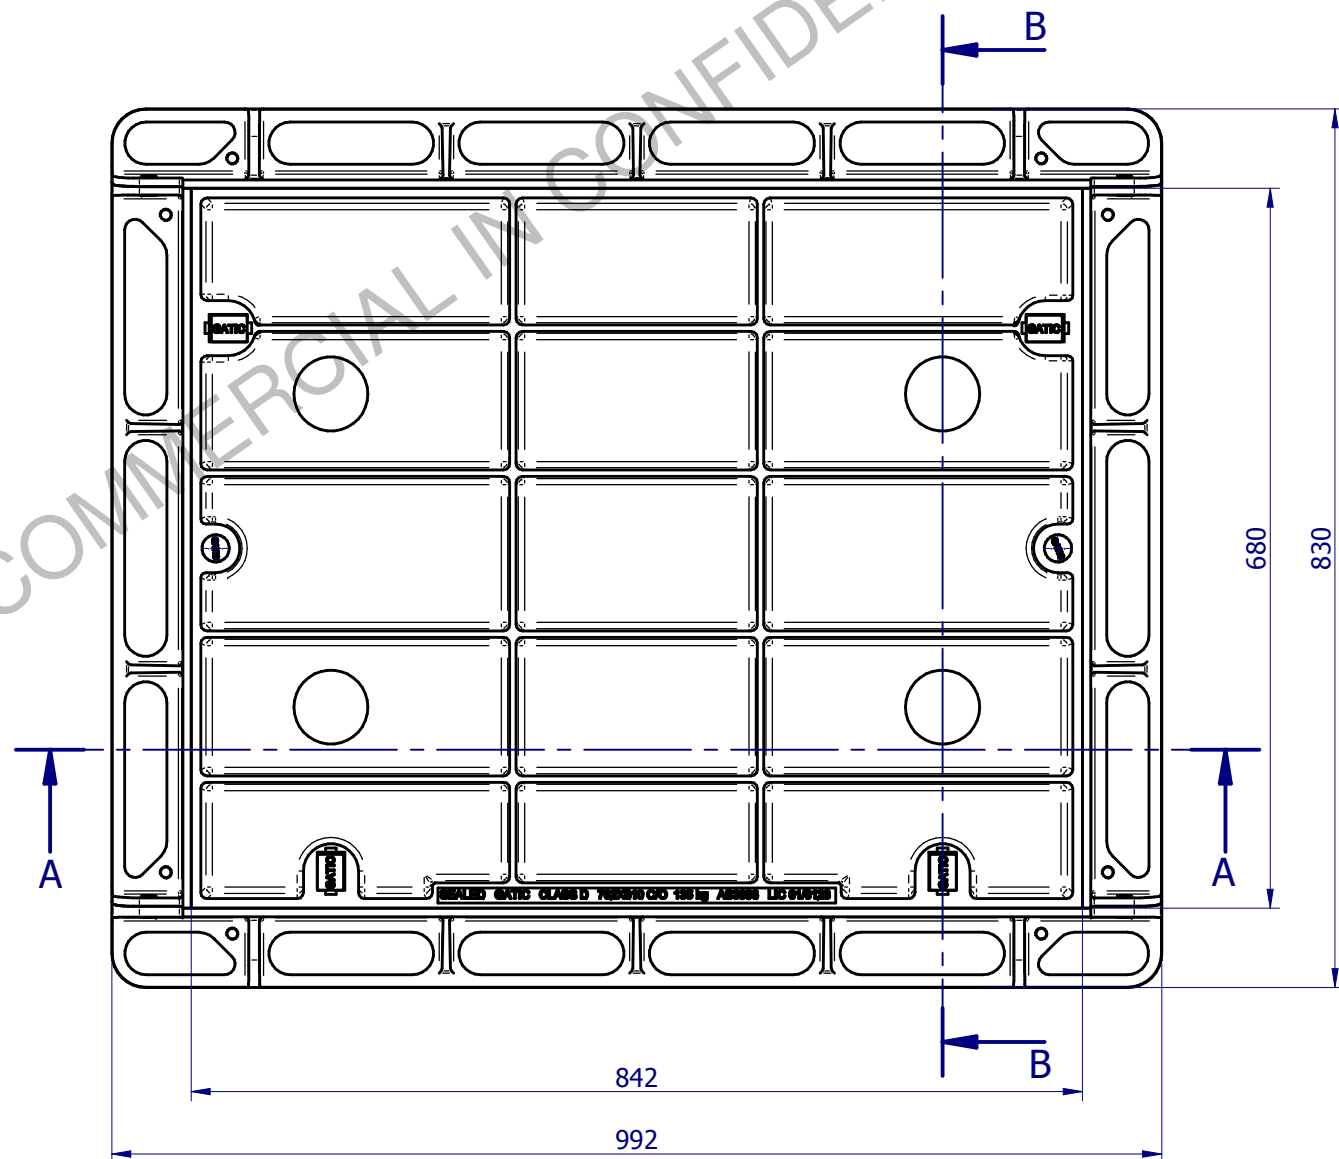

SECTION A-A

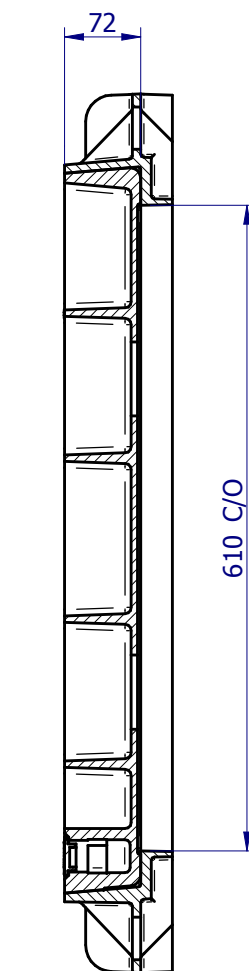

SECTION B-B

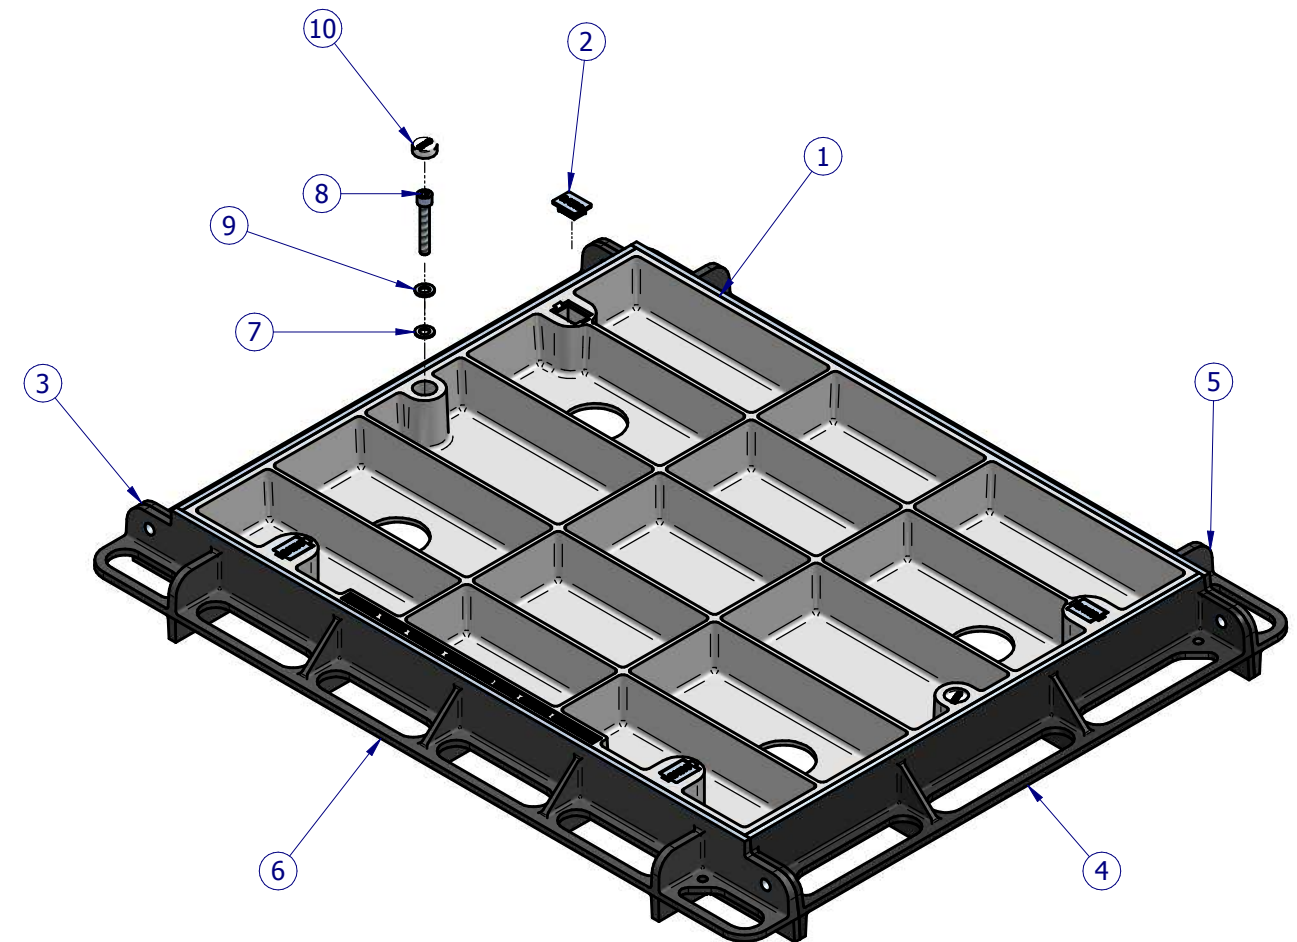

NOTE:
8 only of M10x40 Hex head bolts required
for assembly C/W washers and nuts.

GM301C76D						
Item No.	Drwg.	Rev.	Title	Material	Qty.	Mass (kg)
1	1660	D	762x610 C/O Concrete Infill Cover Class D	Ductile Iron 500 - 7	1	61.7 kg
2	1681	A	Plastic Keyhole Plug	UV Stabilized Nylon	4	0.0 kg
3	4005	B	610mm LH Side Bar Class D	Ductile Iron 500-7	1	9.3 kg
4	4006	B	610mm RH Side Bar Class D	Ductile Iron 500 - 7	1	9.2 kg
5	4012	A	762mm Under Cut Bar Class D	Ductile Iron 500-7	1	10.4 kg
6	4008	A	762mm Draw Cut Bar Class D	Ductile Iron 500-7	1	12.6 kg
7	2856	A	M10 Washer	Nylon, general purpose	2	0.0 kg
8	2857	A	M10x65 Socket Head Cap Bolt	Stainless Steel, 304	2	0.1 kg
9	2855	A	M10 Washer	Stainless Steel, 304	2	0.0 kg
10	2854	C	Plastic Plug Ø26 mm	UV Stabilized Nylon	2	0.0 kg

UNLESS OTHERWISE STATED

ALL MEASURES IN MILLIMETERS.

GENERAL CAST TOLERANCES:
CT9 to ISO 8062.

CASTING RADII: 3 mm

DRAFT TAPERS: 2°

LINEAR MACHINING TOLERANCE:

X. ±0.25 mm

X.X ±0.10 mm

ANGULAR MACHINING TOLERANCE:

X. ±0.5°

X.X ±0.1°

NOM = Nominal; O/A = Overall; TYP = Typical; C/O = Clear Opening

FINISH: ALL CAST SURFACES TO BE PAINTED AS SPECIFIED.

FABRICATED COMPONENTS TO BE HOT DIP GALVANISED TO AS4680.


LIGHT FILM OF GATIC SEALING GREASE TO BE APPLIED ON ALL MACHINED SURFACES.

GATIC

GATIC PTY LTD

9-15 Radford Road, PO Box 312, Reservoir VIC. 3073

Ph: 03 9316 2666 Fax: 03 9315 0099 www.gatic.com.au



THIRD ANGLE PROJECTION

DESIGNED: -- BY: -- DATE: --
DRAWN: F.M. 06-02-15
CHECKED: S.S. 06-02-15
APPROVED: H.B. 06-02-15

CODE: GM301C76D

SCALE: N.T.S.

FORMAT: A3

SHEET: 1 of 1

TITLE: 762x610 C/O CONCRETE INFILL COVER & FRAME

CLASS D - ASSEMBLY

MATERIAL: -- MASS: 103.2 kg

DRG. No: 5520

REV: A