

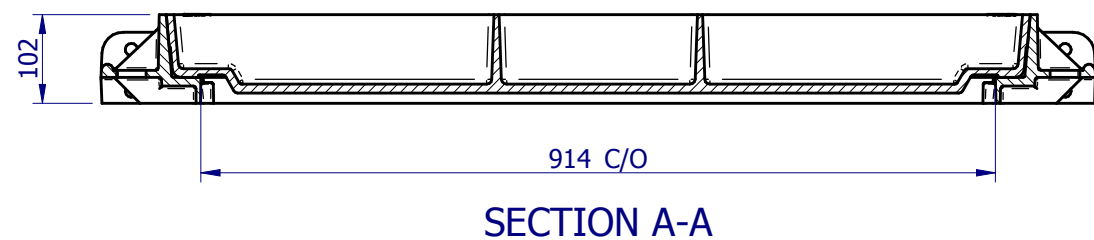
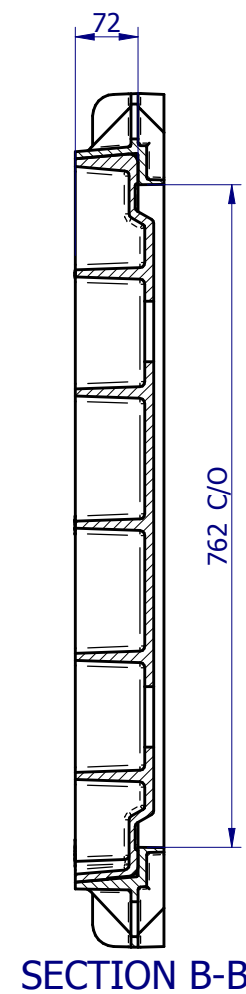


Copyright : Gatic Pty Ltd - 2018

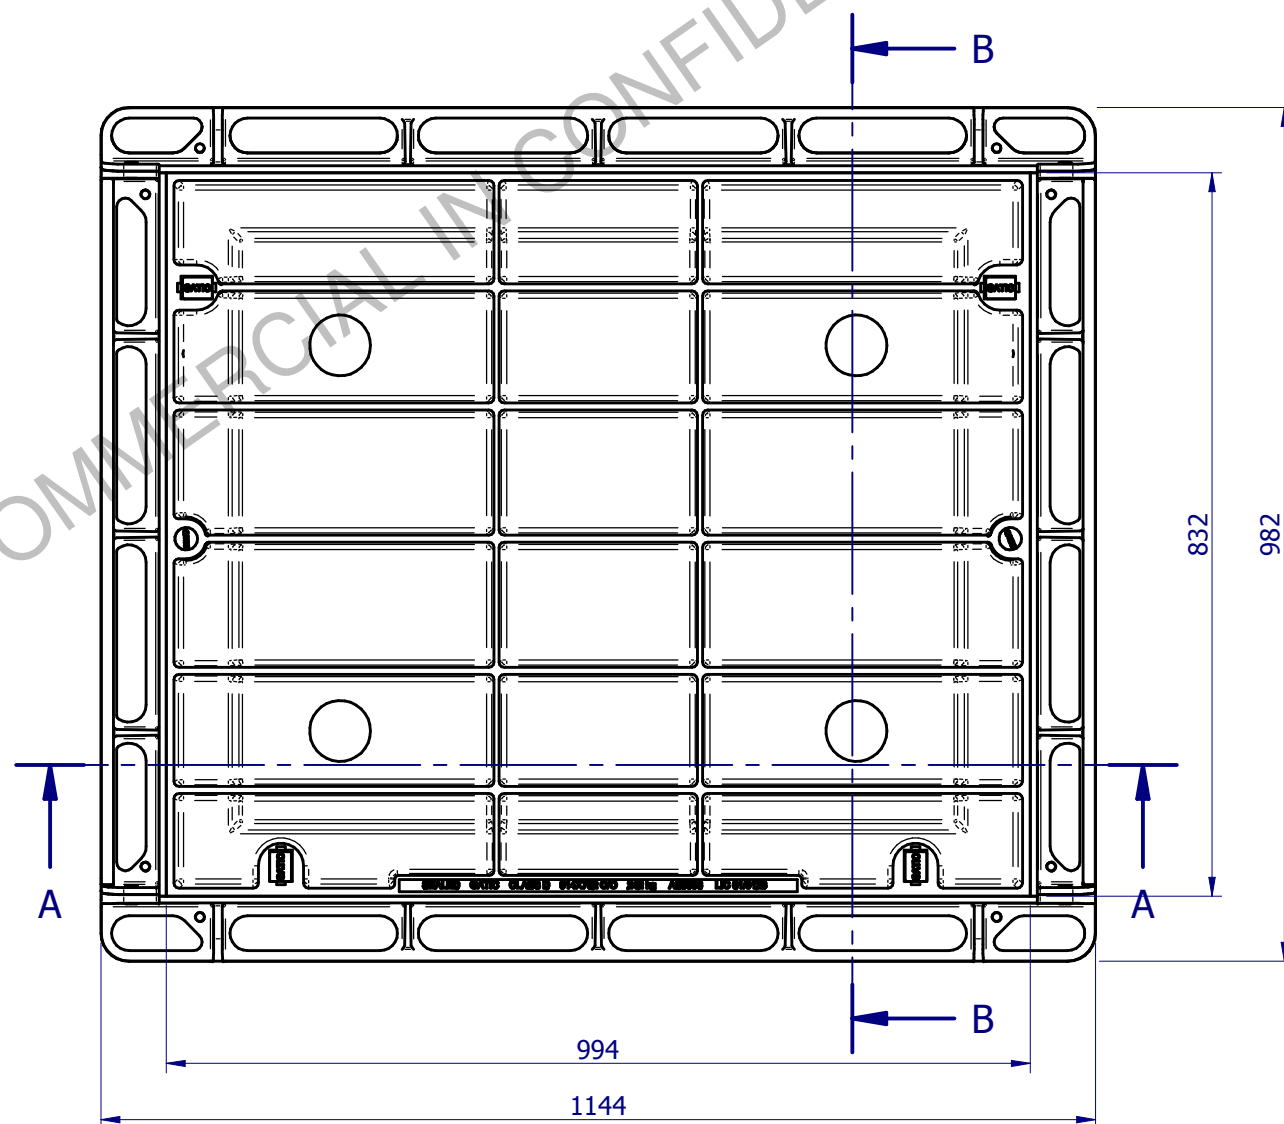

NOTE:
8 only of M10x40 Hex head bolts required
for assembly C/W washers and nuts.

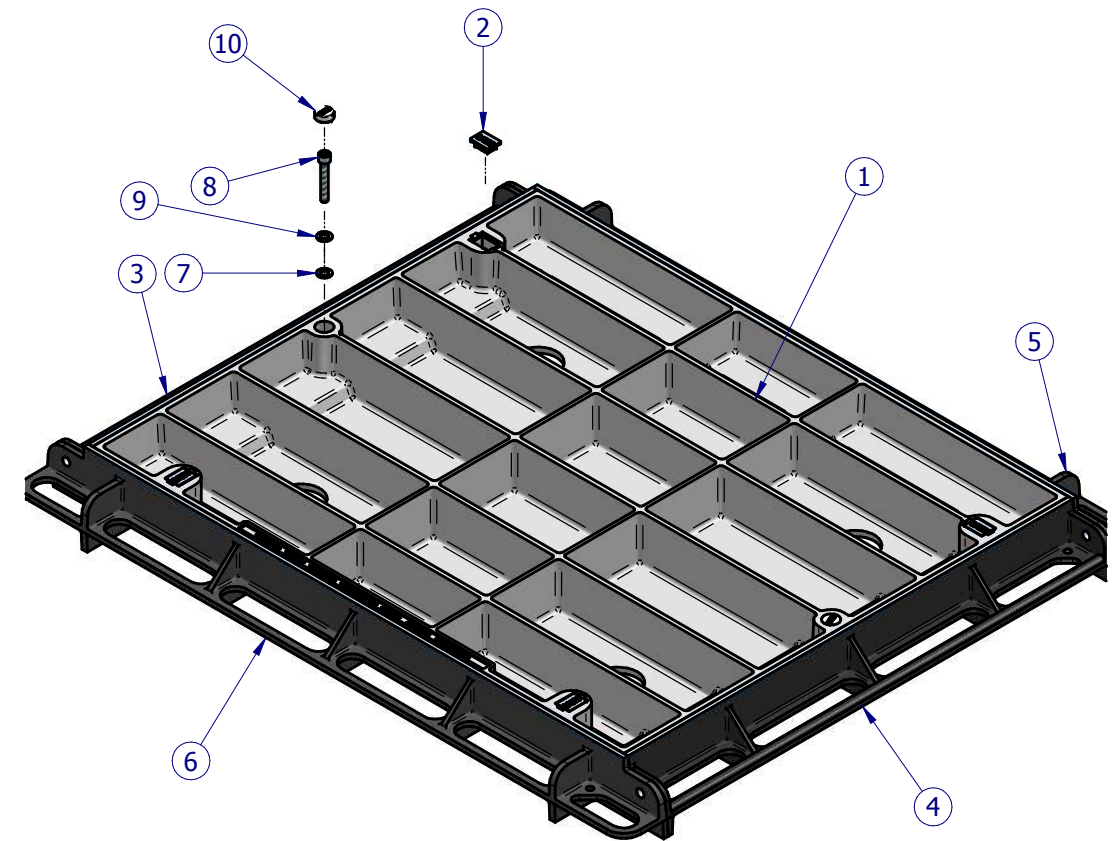

GM301C97D						
Item No.	Drwg.	Rev.	Title	Material	Qty	Mass
1	1725	D	914X762 C/O Concrete Infill Cover Class D	Ductile Iron 500 - 7	1	115.6 kg
2	1681	A	Plastic Keyhole Plug	UV Stabilized Nylon	4	0.0 kg
3	4009	C	762mm LH Side Bar Class D	Ductile Iron 500-7	1	12.0 kg
4	4011	C	762mm RH Side Bar Class D	Ductile Iron 500 - 7	1	11.9 kg
5	4016	A	914mm Under Cut Bar Class D	Ductile Iron 500-7	1	11.8 kg
6	4013	A	914mm Draw Cut Bar Class D	Ductile Iron 500-7	1	14.4 kg
7	2856	A	M10 Washer	Nylon, general purpose	2	0.0 kg
8	2857	A	M10x65 Socket Head Cap Bolt	Stainless Steel, 304	2	0.1 kg
9	2855	A	M10 Washer	Stainless Steel, 304	2	0.0 kg
10	2854	C	Plastic Plug Ø26 mm	UV Stabilized Nylon	2	0.0 kg

REVISION	No	DATE	DESCRIPTION	BY	CKD.
A	14-09-18	Initial Release		F.M.	S.S.

UNLESS OTHERWISE STATED
ALL MEASURES IN MILLIMETERS.
GENERAL CAST TOLERANCES:
CT9 to ISO 8062.
CASTING RADII: 3 mm
DRAFT TAPERS: 2°

LINEAR MACHINING TOLERANCE:
X. ±0.25 mm
X.X ±0.10 mm
ANGULAR MACHINING TOLERANCE:
X. ±0.5°
X.X ±0.1°

NOM = Nominal; O/A = Overall; TYP = Typical; C/O = Clear Opening
FINISH: ALL CAST SURFACES TO BE PAINTED AS SPECIFIED.
FABRICATED COMPONENTS TO BE HOT DIP GALVANISED TO AS4680.
LIGHT FILM OF GATIC SEALING GREASE TO BE APPLIED ON ALL MACHINED SURFACES.

GATIC
GATIC PTY LTD
9-15 Radford Road, PO Box 312, Reservoir VIC. 3073
Ph- 03 9316 2666 Fax- 03 9315 0099 www.gatic.com.au

THIRD ANGLE
PROJECTION

DESIGNED:	BY	DATE	CODE:
	--	--	GM301C97D
DRAWN:	F.M.	05-02-15	SCALE:
			N.T.S.
CHECKED:	S.S.	05-02-15	FORMAT:
			A3
APPROVED:	H.B.	05-02-15	SHEET:
			1 of 1

TITLE: 914x762 C/O CONCRETE INFILL COVER & FRAME
CLASS D - ASSEMBLY
MATERIAL: --
DRG. No: 5522
MASS: 165.8 kg
REV: A