
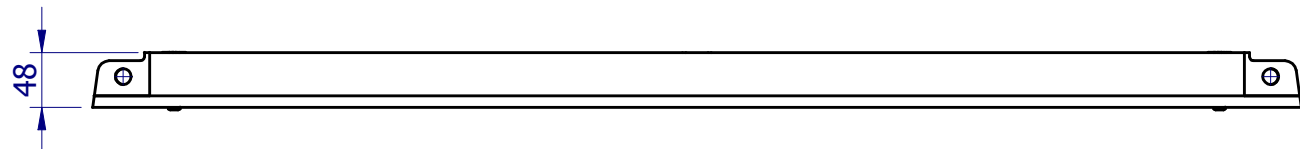
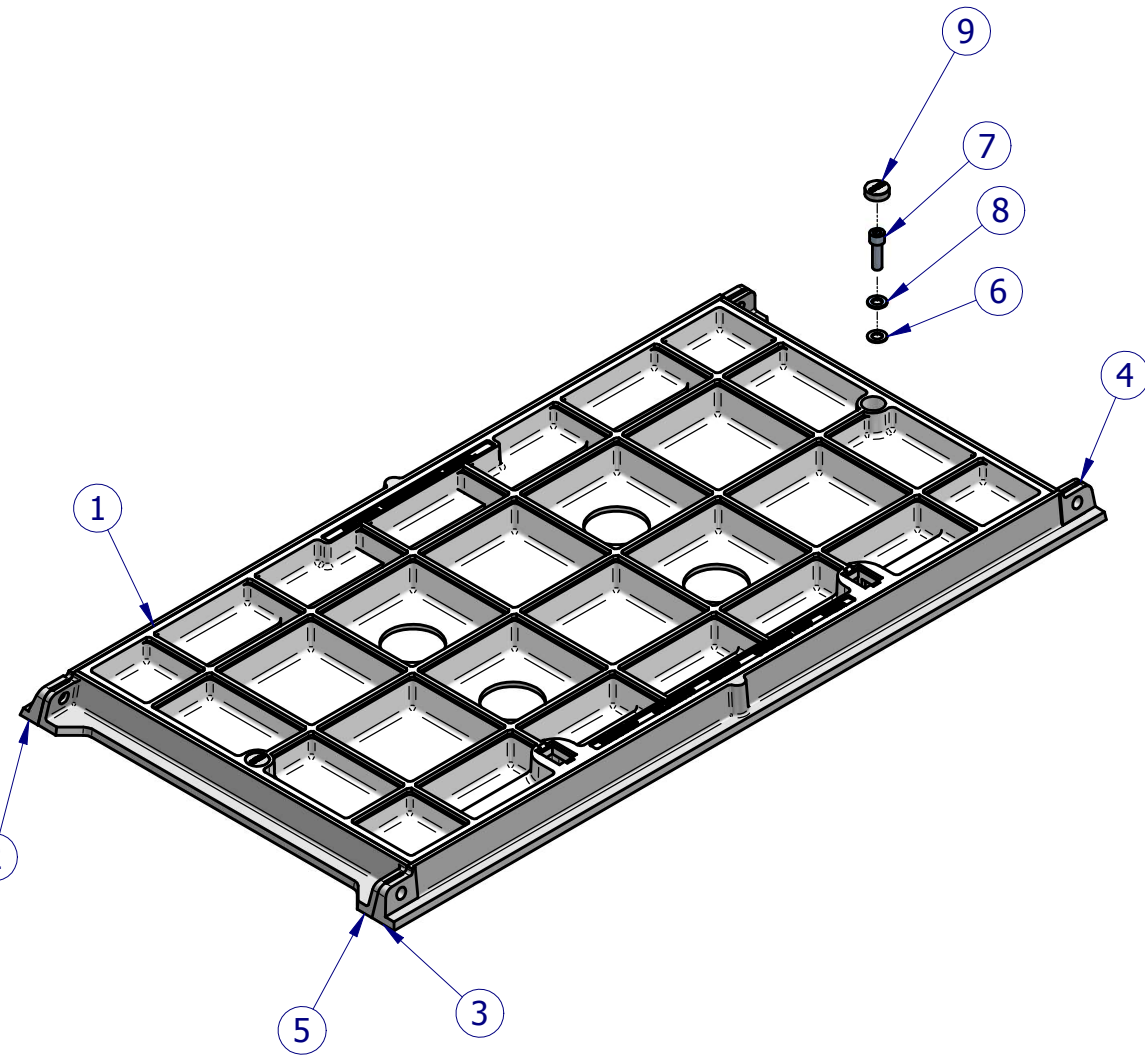


© Copyright : Gatic Pty Ltd - 2008

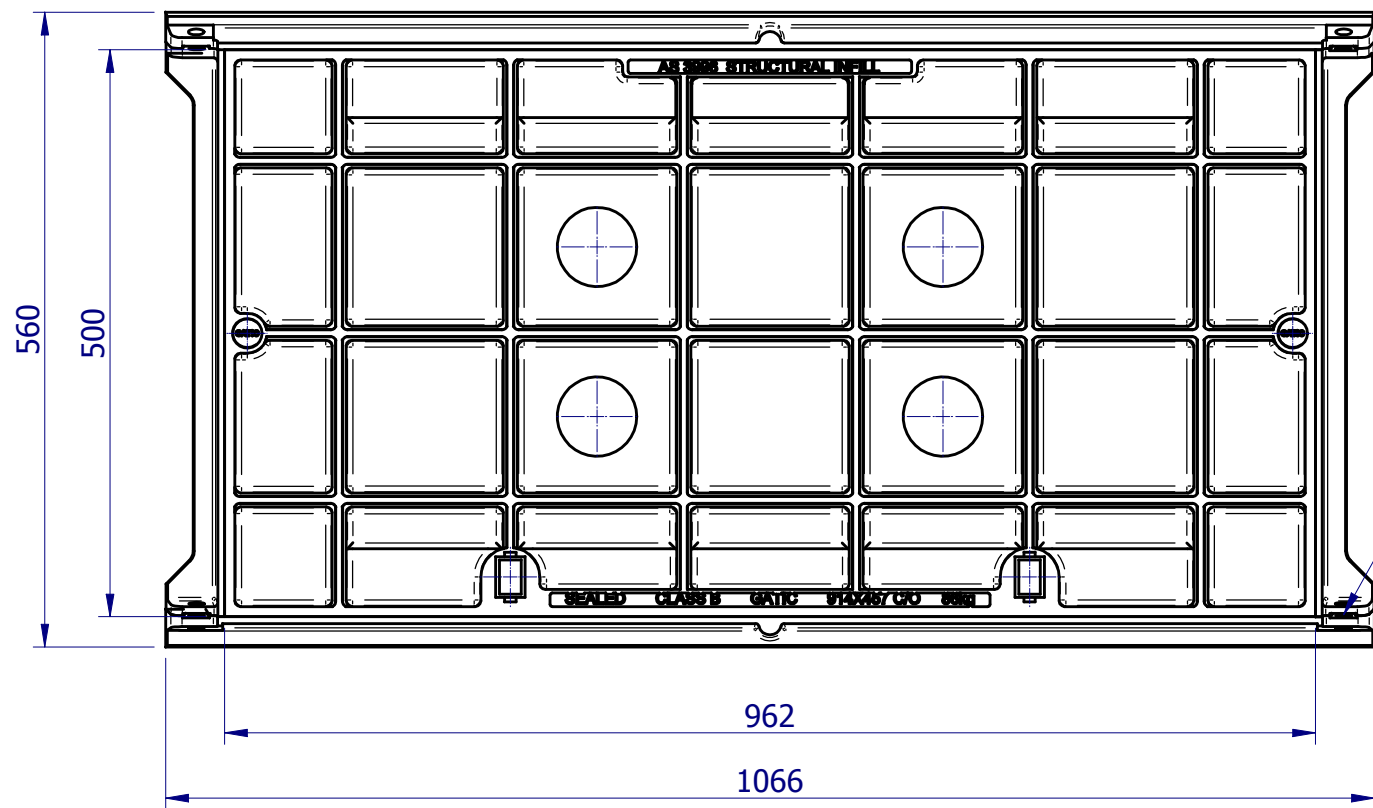

Item No.	Document No.	Revision	Title	Material	Qty	Mass
1	2859	A	914x457 C/O Concrete Infill Cover Class B	Ductile Iron 500-7	1	49.550 kg
2	2707	B	914 mm Under Cut Bar Class B	Ductile Iron 500 - 7	1	6.315 kg
3	2706	B	914 mm Draw Cut Bar Class B	Ductile Iron 500 - 7	1	6.608 kg
4	2700	A	457 mm RH Side Bar Class B	Ductile Iron 500 - 7	1	3.304 kg
5	2701	A	457 mm LH Side Bar Class B	Ductile Iron 500 - 7	1	3.304 kg
6	2856	A	M10 Washer	Nylon, general purpose	2	0.001 kg
7	2858	A	M10x35 Socket Head Cap Bolt	Stainless Steel, 304	2	0.074 kg
8	2855	A	M10 Washer	Stainless Steel, 304	2	0.008 kg
9	2854	B	Plastic Plug Ø26 mm	UV Stabilized Nylon	2	0.005 kg

REVISION		BY		DATE		DESCRIPTION		F.M.		S.S.		CKD.		REV	
A	27-07-08	Initial Release													
No	DATE	DESCRIPTION													
1															
2															
3															
4															
5															
6															
7															
8															
9															
10															
11															
12															
13															
14															
15															
16															

UNLESS OTHERWISE STATED
GENERAL CAST TOLERANCES:
CT9 to ISO 8062.
CASTING RADII: 3 mm
DRAFT TAPERS: 2°

ALL MEASURES IN MILLIMETERS.
MACHINING TOLERANCES:
X. ±0.25 mm
X.X ±0.10 mm
X.XX ±0.05 mm
ANGULAR:
X. ±0.5°
X.X ±0.1°

NOM = Nominal; O/A = Overall; TYP = Typical; C/O = Clear Opening
FINISH: ALL CAST SURFACES TO BE PAINTED AS SPECIFIED.
LIGHT FILM OF GATIC SEALING GREASE APPLIED TO MACHINED SURFACES.

GATIC
GATIC PTY LTD
9-15 Radford Road, PO Box 312, Reservoir VIC. 3073
Ph- 03 9316 2666 Fax- 03 9315 0099 www.gatic.com.au

THIRD ANGLE
PROJECTION

DESIGNED:	F.M.	16-07-08
DRAWN:	F.M.	27-07-08
CHECKED:	S.S.	27-07-08
APPROVED:	H.B.	27-07-08

TITLE:	914X457 C/O CONCRETE INFILL COVER & FRAME ASSY CLASS B		
SCALE:	N.T.S.	CODE:	GM301C94B
DRG. No:	2860		
REV:	A		