

PVC PRESSURE SYSTEM

PVC-O



PDRA16250

DN250 x 6m PN16 Apollo Blue Series 2 PVC-O Pipe Rieber RRJ

APPLICATION Used for above or below ground applications to convey potable water in pressure applications


FEATURES

- Australian Made
- BEP PVC - Manufactured from Best Environmental Practice PVC
- Installation Economics
- Operation Efficiencies
- Corrosion Resistant
- Light weight
- Excellent Toughness and Ductility
- Large Internal Diameter and Smooth bore

TECHNICAL DATA

PRODUCT PROPERTIES

| | |
|---|---------|
| Primary Material | PVC-O |
| Colour | Blue |
| Joint Type | RRJ |
| Rubber Ring Material | EPDM |
| Allowable Operation Temperature - Degrees | 50°C |
| Allowable Operating Pressure - 20°C | 1600kPa |
| Average # of Joints per Litre – Iplex Lubricant | 12 |
| Unprotected UV Exposure (years) | 2 Years |
| Maximum Diametric Deflection - 50 Years | 7.50% |
| Minimum Radius of Curvature | 75m |
| Socket Deflection | 1° |

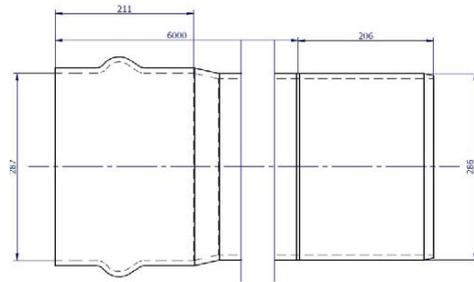

PRODUCT DIMENSIONS

| | | | |
|----------------|---------|-----------------------|---------|
| Category | Length | Socket Depth | 211mm |
| Rating | PN16 | Max Socket Nominal OD | 336.4mm |
| Length | 6m | Weight | 65kg |
| Nominal | 250mm | Crate Qty | 8 |
| ID | 270.0mm | Crate Weight | 504kg |
| Wall Thickness | 7.9mm | | |

ENVIRONMENTAL CREDENTIALS AND STANDARDS

| | |
|------------------------------|---|
| Environmental Accreditation | Best Environmental PVC - PVC Certificate No. BEP-PVC 0037 |
| Product Standard | AS/NZS 441 "Orientated PVC (PVC-O) Pipes for Pressure Applications" |
| Standards Mark Certification | SMKP20188 |
| WSAA Appraisal | PA1612 |

MATERIAL PROPERTIES

MECHANICAL

| | |
|------------------------------|---------|
| Density Specific Gravity | 1.47 |
| Ultimate Tensile Strength | 52MPa |
| Yield Strain | 5.5% |
| Compressive Strength | 66MPa |
| Tensile Modulus | 4000MPa |
| Hardness Shore D | 85 |
| Poissons Ratio | 0.38 |
| Design Stress | 28MPa |
| Ring Bending Modulus (3mins) | 4000MPa |
| Ring Bending Modulus (50Yrs) | 1800MPa |

THERMAL

| | |
|----------------------------------|-------------------------------------|
| Coefficient of Thermal Expansion | $7 \times 10^{-5} / ^\circ\text{C}$ |
| Thermal Conductivity | 0.138W/m.K |
| Specific Heat | 1047 J/kg/°C |
| Vicat Softening Temperature | >79°C |
| Flammability | Will not support combustion |
| Fire Index – Ignitability | 2 |
| Fire Index – Smoke Development | 8 |
| Fire Index – Spread of Flame | 0 |
| Fire Index – Heat Evolved | 2 |

©Copyright: Iplex Pty Ltd 2019 all rights reserved. All drawings and information contained thereon are the exclusive property of Iplex Pipelines. Unless specifically noted, this drawing and information enclosed are subject to change at any time. Measures are for reference purpose only. If critical please contact Iplex Pipelines.

