


Copyright : Gatic Pty Ltd - 2008

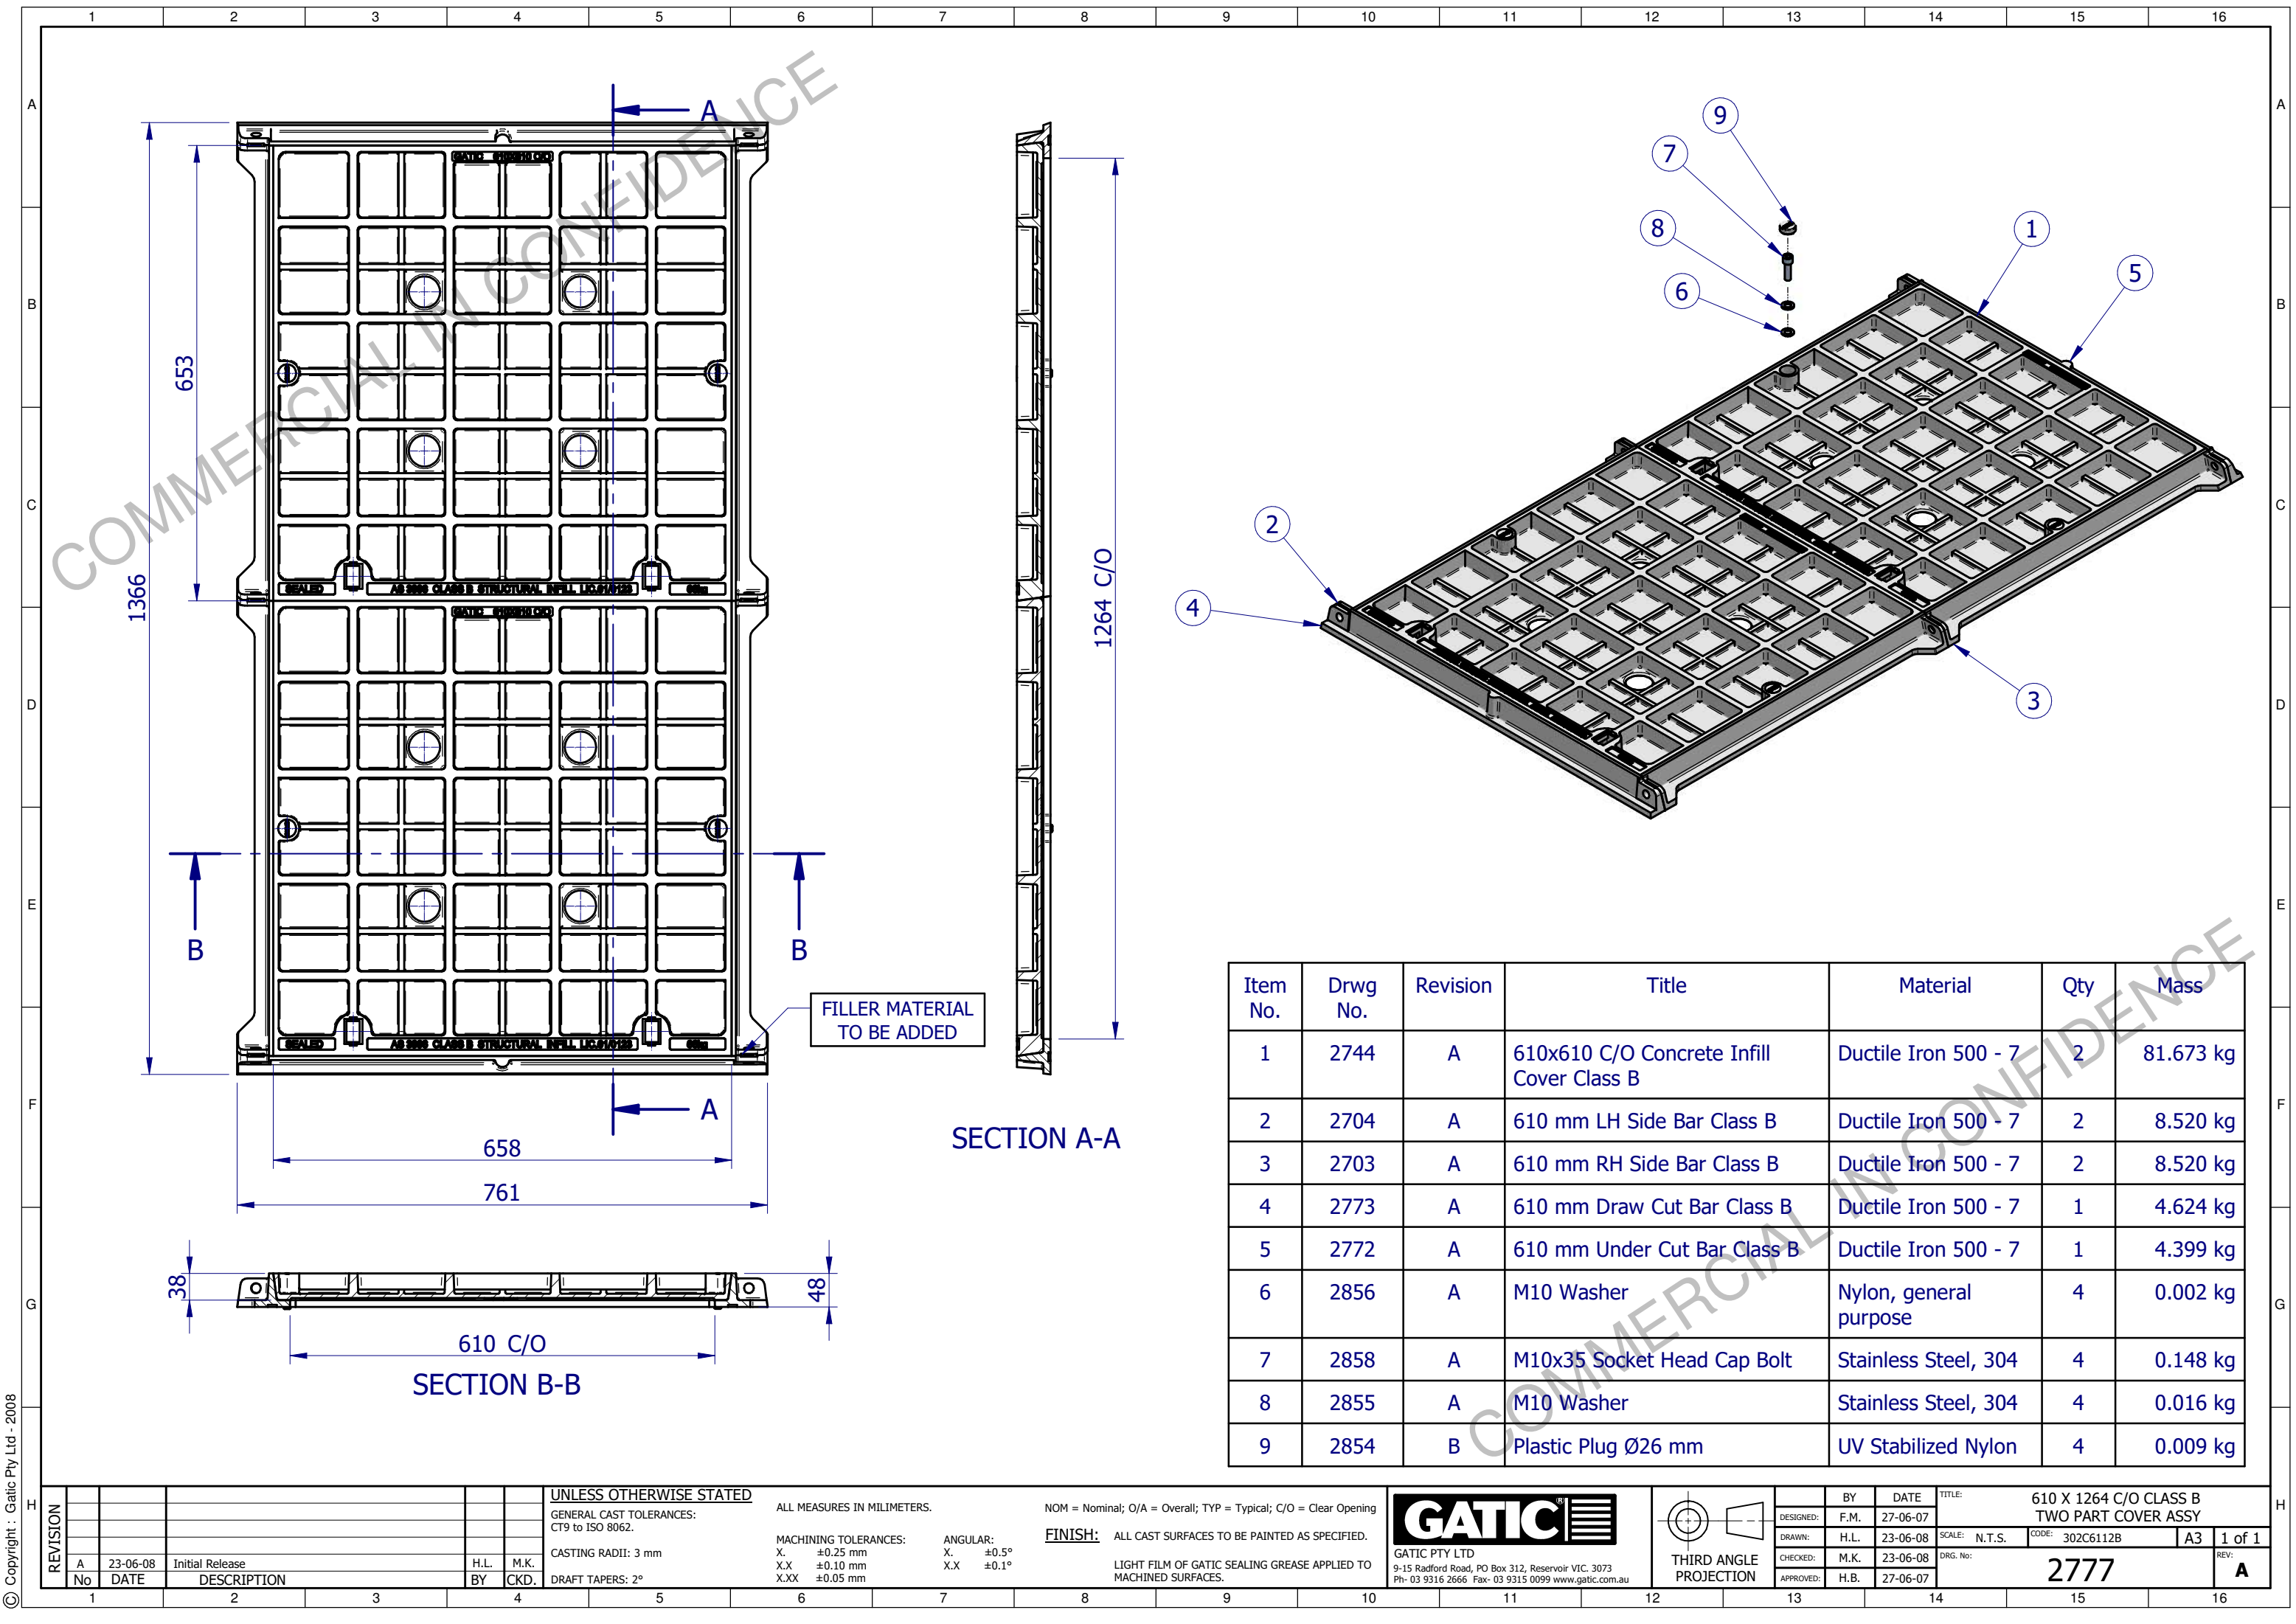

Item No.	Drwg No.	Revision	Title	Material	Qty	Mass
1	2744	A	610x610 C/O Concrete Infill Cover Class B	Ductile Iron 500 - 7	2	81.673 kg
2	2704	A	610 mm LH Side Bar Class B	Ductile Iron 500 - 7	2	8.520 kg
3	2703	A	610 mm RH Side Bar Class B	Ductile Iron 500 - 7	2	8.520 kg
4	2773	A	610 mm Draw Cut Bar Class B	Ductile Iron 500 - 7	1	4.624 kg
5	2772	A	610 mm Under Cut Bar Class B	Ductile Iron 500 - 7	1	4.399 kg
6	2856	A	M10 Washer	Nylon, general purpose	4	0.002 kg
7	2858	A	M10x35 Socket Head Cap Bolt	Stainless Steel, 304	4	0.148 kg
8	2855	A	M10 Washer	Stainless Steel, 304	4	0.016 kg
9	2854	B	Plastic Plug Ø26 mm	UV Stabilized Nylon	4	0.009 kg

UNLESS OTHERWISE STATED

GENERAL CAST TOLERANCES:
CT9 to ISO 8062.

CASTING RADII: 3 mm
DRAFT TAPERS: 2°

ALL MEASURES IN MILLIMETERS.

MACHINING TOLERANCES:
X. ±0.25 mm
X.X ±0.10 mm
X.XX ±0.05 mm

ANGULAR:
X. ±0.5°
X.X ±0.1°


NOM = Nominal; O/A = Overall; TYP = Typical; C/O = Clear Opening

FINISH: ALL CAST SURFACES TO BE PAINTED AS SPECIFIED.

LIGHT FILM OF GATIC SEALING GREASE APPLIED TO MACHINED SURFACES.



GATIC PTY LTD
9-15 Radford Road, PO Box 312, Reservoir VIC. 3073
Ph- 03 9316 2666 Fax- 03 9315 0099 www.gatic.com.au



THIRD ANGLE
PROJECTION

DESIGNED:	BY	DATE
DRAWN:	F.M.	27-06-07
CHECKED:	H.L.	23-06-08
APPROVED:	M.K.	23-06-08
	H.B.	27-06-07

TITLE: 610 X 1264 C/O CLASS B
TWO PART COVER ASSY

SCALE: N.T.S. CODE: 302C6112B

2777

A3 1 of 1

REV: A