


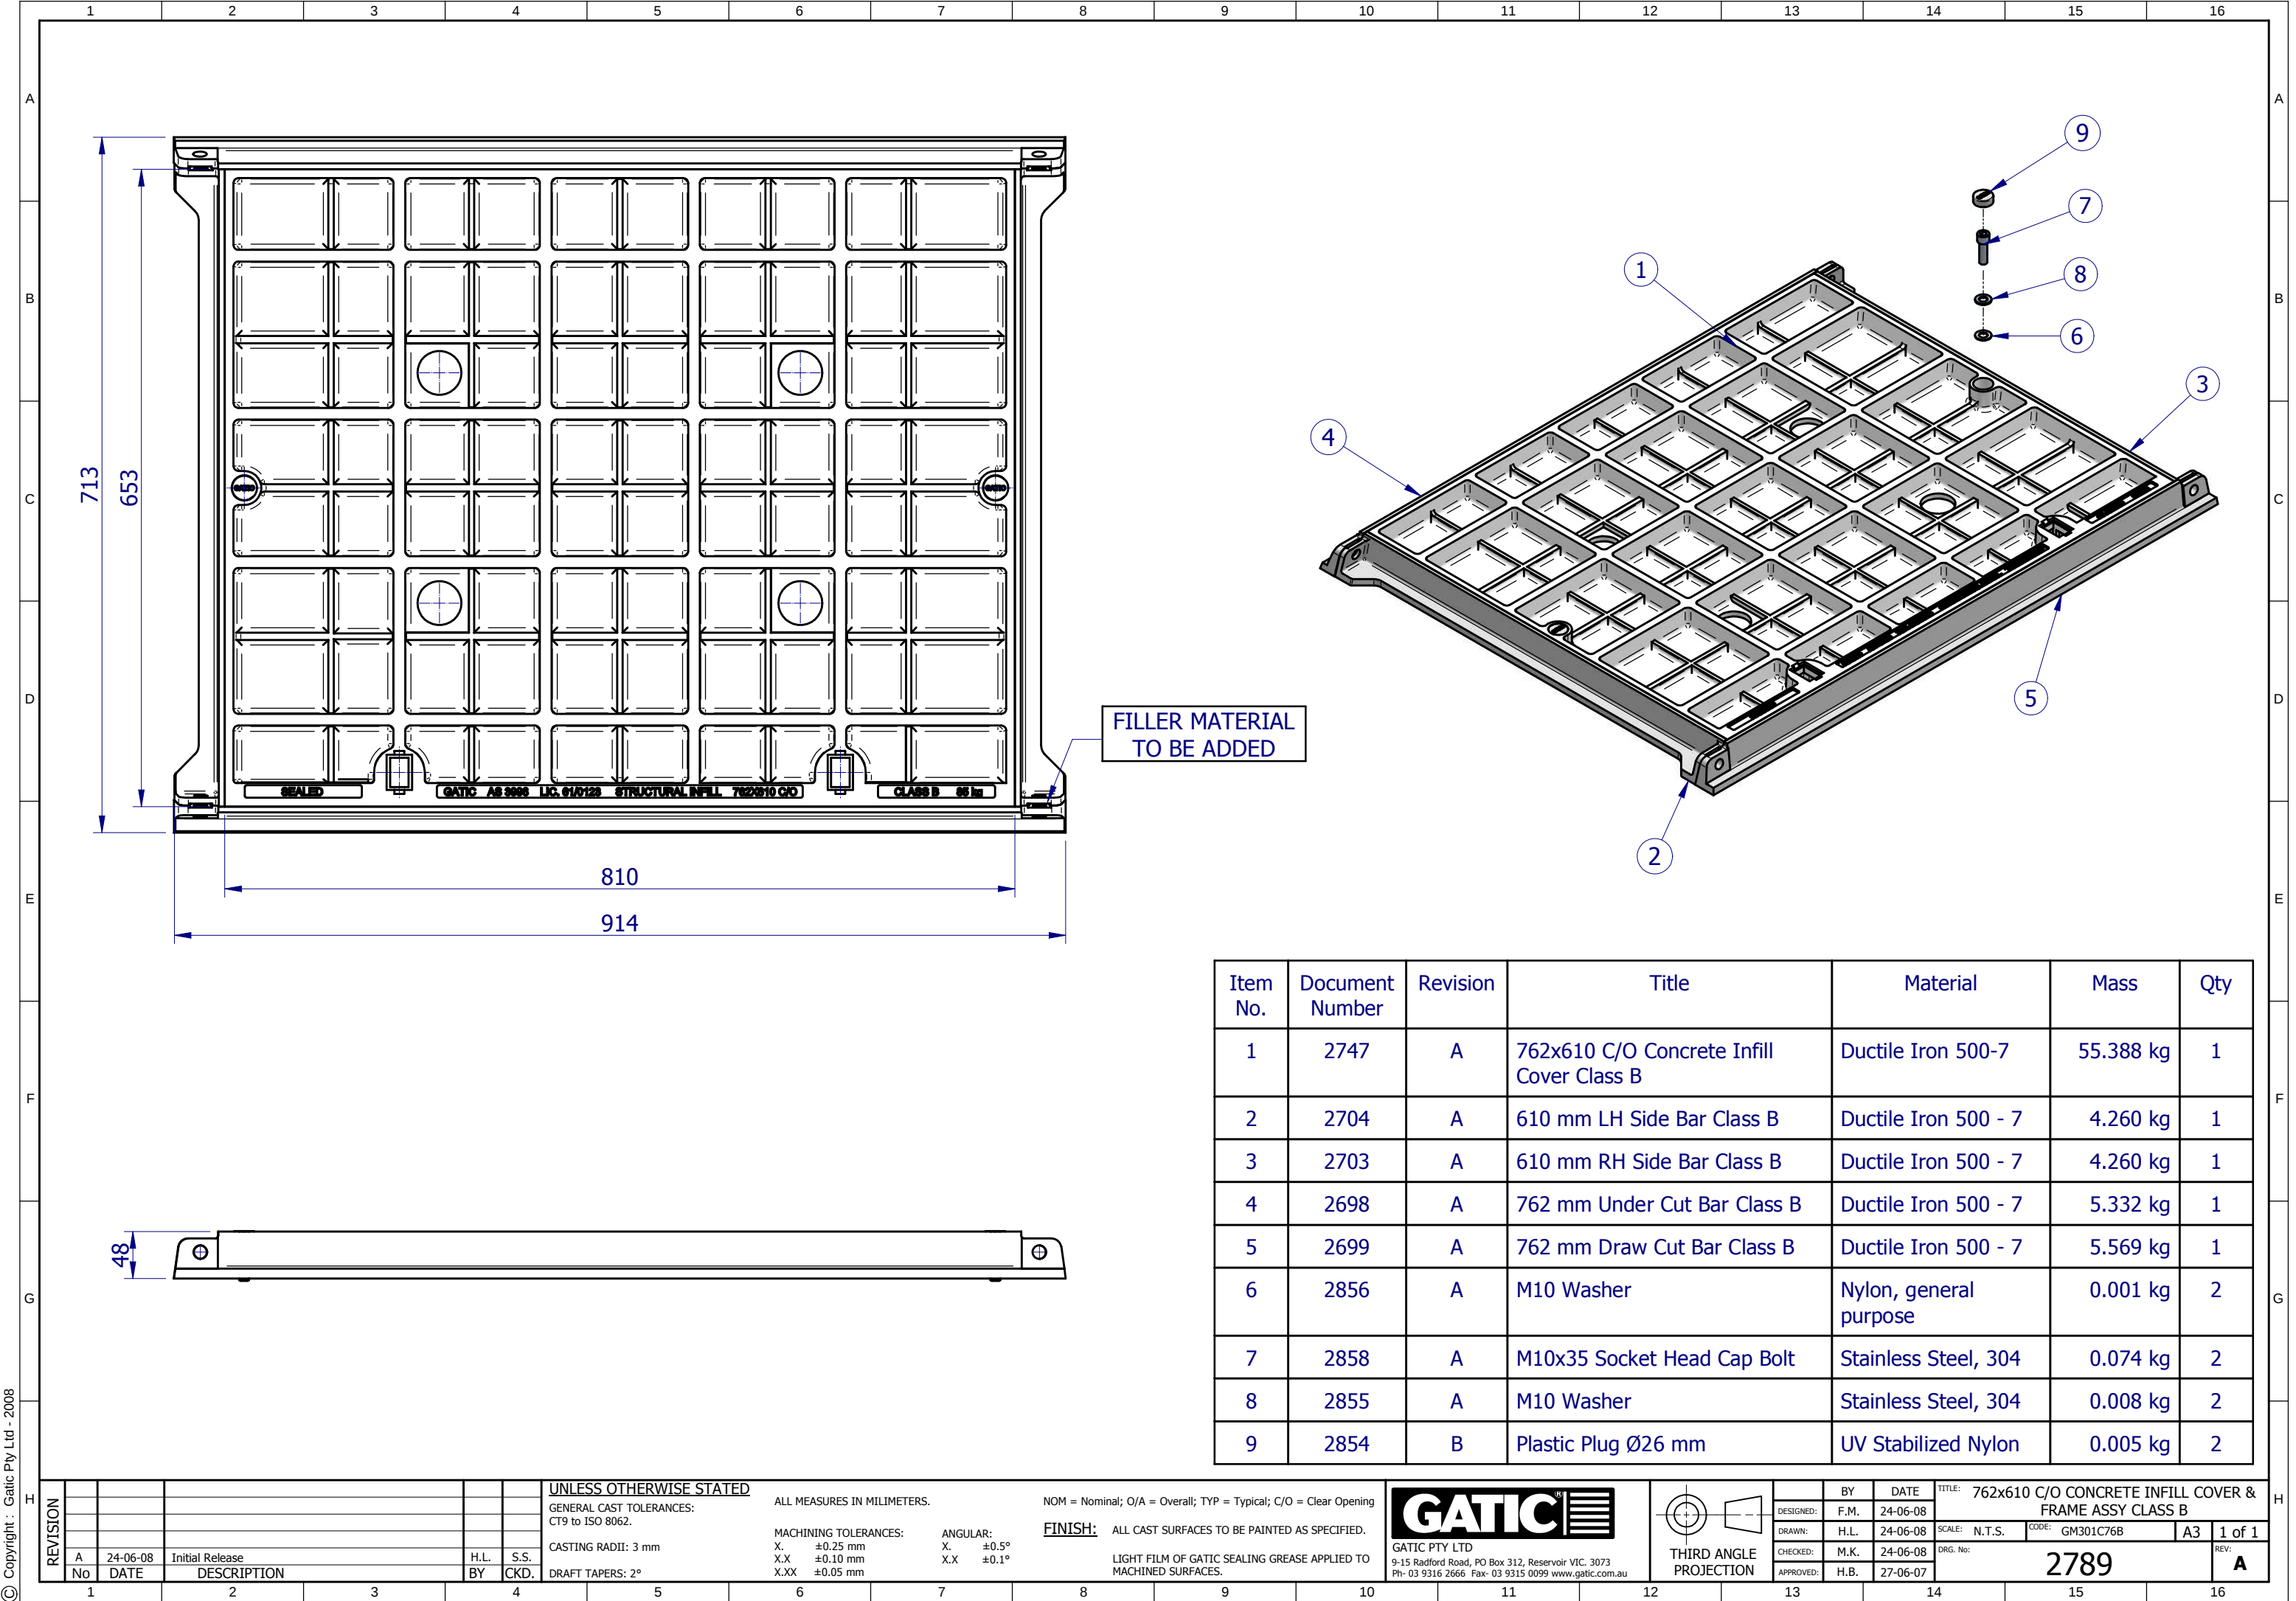

Item No.	Document Number	Revision	Title	Material	Mass	Qty
1	2747	A	762x610 C/O Concrete Infill Cover Class B	Ductile Iron 500-7	55.388 kg	1
2	2704	A	610 mm LH Side Bar Class B	Ductile Iron 500 - 7	4.260 kg	1
3	2703	A	610 mm RH Side Bar Class B	Ductile Iron 500 - 7	4.260 kg	1
4	2698	A	762 mm Under Cut Bar Class B	Ductile Iron 500 - 7	5.332 kg	1
5	2699	A	762 mm Draw Cut Bar Class B	Ductile Iron 500 - 7	5.569 kg	1
6	2856	A	M10 Washer	Nylon, general purpose	0.001 kg	2
7	2858	A	M10x35 Socket Head Cap Bolt	Stainless Steel, 304	0.074 kg	2
8	2855	A	M10 Washer	Stainless Steel, 304	0.008 kg	2
9	2854	B	Plastic Plug Ø26 mm	UV Stabilized Nylon	0.005 kg	2

REVISION

A	24-06-08	Initial Release	H.L.	S.S.
No	DATE	DESCRIPTION	BY	CKD.
1				

UNLESS OTHERWISE STATED

GENERAL CAST TOLERANCES:
CT9 to ISO 8062.

CASTING RADII: 3 mm

DRAFT TAPERS: 2°

ALL MEASURES IN MILLIMETERS.

MACHINING TOLERANCES:
X. ±0.25 mm
X.X ±0.10 mm
X.XX ±0.05 mm

ANGULAR:
X. ±0.5°
X.X ±0.1°

NOM = Nominal; O/A = Overall; TYP = Typical; C/O = Clear Opening

FINISH: ALL CAST SURFACES TO BE PAINTED AS SPECIFIED.

LIGHT FILM OF GATIC SEALING GREASE APPLIED TO MACHINED SURFACES.

GATIC

GATIC PTY LTD
9-15 Radford Road, PO Box 312, Reservoir VIC. 3073
Ph- 03 9316 2666 Fax- 03 9315 0099 www.gatic.com.au

THIRD ANGLE PROJECTION

BY F.M. 24-06-08

DATE 24-06-08

DESIGNED: H.L.

DRAWN: M.K.

CHECKED: H.B.

APPROVED:

TITLE: 762x610 C/O CONCRETE INFILL COVER & FRAME ASSY CLASS B

SCALE: N.T.S.

CODE: GM301C76B

A3

1 of 1

REV: A

DRG. No:

2789